

# SWIT®

## S-8D58 Rechargeable Li-ion Battery Pack

Ver:V1.0.0V00

# USER MANUAL

## SWIT Electronics Co.,LTD.

Tel: +86-25-85805753  
Fax: +86-25-85805296  
http://www.swit.cc  
E-mail: contact@swit.cc

### Characteristics

1. High performance Li-ion battery pack, rechargeable.
2. The battery pack is compatible with Panasonic P2HD AJ-PX270/285/298 cameras and can be charged with Panasonic DE-A88 charger.
3. 43Wh/6000mAh large capacity.
4. 4-step LED power indicator.
5. 5.5mm 7.2V Pole DC output socket and 5V/1A USB DC output socket.
6. Build-in multiple protective circuit design.

### Caution


1. The battery pack is not fully charged when it is purchased. Charge the battery before use.
2. Fully charged battery pack will discharge naturally and please use it as soon as it gets charged.
3. Never short-circuit the battery pack terminals.
4. Keep the battery pack terminals clean.
5. The battery pack may become warm in use or while being charged. This is normal.
6. Never expose the battery pack to rain, fire or moisture.
7. Never expose the battery pack to temperature above 60°C.
8. At low temperature, the running time of battery pack usually decreases.
9. Store the battery pack in cool, dry and clean place.

#### IMPORTANT SAFETY INSTRUCTIONS

- △ Never short-circuit the battery pack terminals.
- △ Never attempt to open the battery pack.
- △ Keep the battery pack away from fire.
- △ Avoid strong mechanical shock.


### Charging

1. The battery pack should be charged within a temperature range of 0-40°C.
2. The battery pack can be charged by SWIT S-3602D or Panasonic DE-A88 via bottom terminals, or charged by SWIT portable charger S-3010D via Pole DC socket.

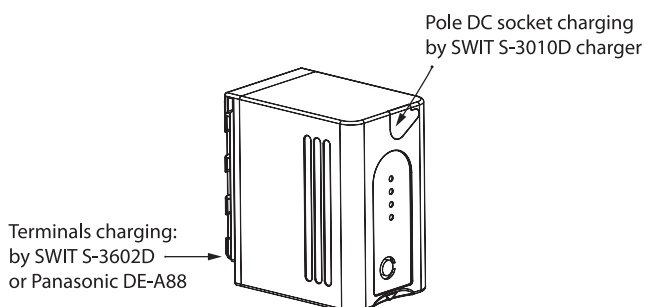


### LED indicator

1. The four-step LEDs indicate the remaining capacity when press the power check button.
2. When only one LED indicates, please charge the battery as soon as possible.



### DC output

1. Pole DC socket - 5.5/2.1mm, 7.2V, Max output 30W  
Output power to other camera equipments like camera light simultaneously when battery is powering the camera.
2. USB socket - 5V/1A, Max output 5W  
Press the Power Check button, the USB will output power to charge devices like cell phones.  
Note: During USB charging output, it won't stop charging if the power check button is pressed again. When the charging device is fully charged or disconnected, or the battery is in low power, the USB power output will automatically stop.
3. Please close the rubber cover to keep the socket away from dust.

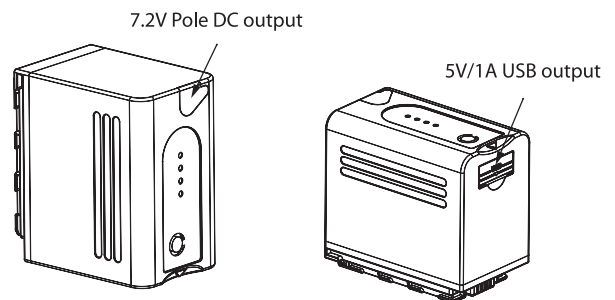

### Specification

Model	S-8D58	
Voltage	7.2V	
Capacity	43Wh, 6000mAh	
Max output	Pins	25W, 3.5A
	DC socket	30W, 4A
	USB socket	5W (5V / 1A)
	Total	30W, 4A
Applicable camera	Panasonic AJ-PX270/285/298	
Dimension	41×70×64mm	
Net weight	235g	